




1325 Furneaux Road, Plumas Lakes, CA. 95961  
 (530) 742-9675  
 www.placerwaterworks.com

# INSULATED BACKFLOW ENCLOSURE

## PW/ FTW

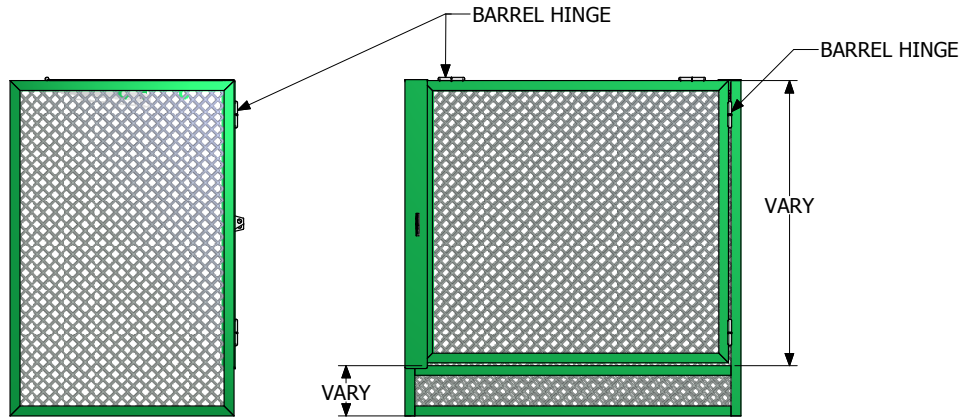


**SIDE VIEW**

**FRONT VIEW**

**NOTES:**

1. ENCLOSURE TYPE: FTW : INSULATED TWO DOOR BACKFLOW ENCLOSURE
2. FRAME MATERIAL: 1-3/4" X 1-3/4" X 3/16" ANGLE IRON
3. EXPANDED METAL SCREEN IS NO.9 W/ 1-1/2" WELDED EVERY 6"
4. BOTH DOORS HAVE WELDED BARREL HINGE
5. UPPER DOOR HAS OPEN POSITION SELF LOCKING SUPPORT
6. UPPER DOOR ACCESS IS OBTAINED BY REMOVAL OF 3/8" BOLT FROM THE INTERIOR OF ENCLOSURE
7. (4) FOUNDATION ANCHOR PLATES W/ 5/8" DIA. HOLE
8. ALL PARTS TO BE SAND BLASTED TO SSPC-5 THK. W/ METAL BLAST, W/ A 3-4 MILS ANGULAR PROFILE
9. POWDER COATED HUNTER GREEN TO 3 MILS THICKNESS AFTER FABRICATION
10. SINGLE PADLOCK SECURES TWO SPRING LOADED SST LOCKING RODS.
11. ALL WELDING DONE PER AWS SPECIFICATIONS.
12. CUSTOM SIZE AVAILABLE.

CAT#: PW/FTW - INSULATED BACKFLOW ENCLOSURE TWO DOOR

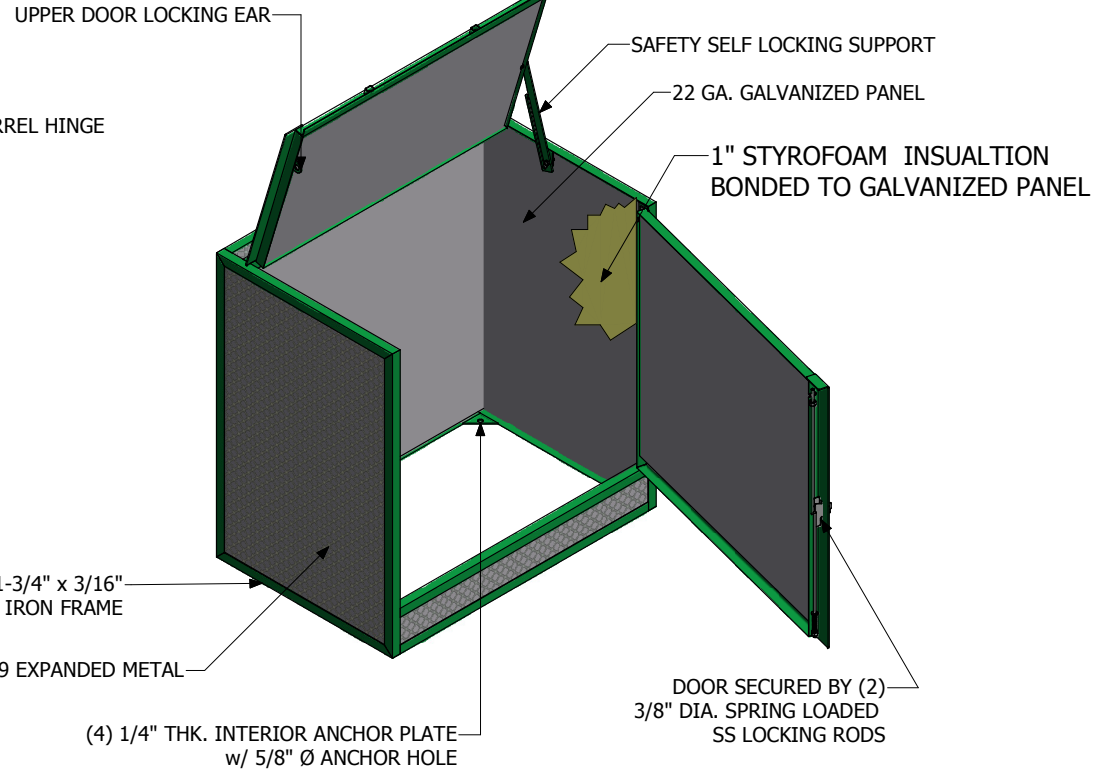

L 1-3/4" x 1-3/4" x 3/16"  
ANGLE IRON FRAME

1-1/2" #9 EXPANDED METAL

(4) 1/4" THK. INTERIOR ANCHOR PLATE  
w/ 5/8" Ø ANCHOR HOLE

DOOR SECURED BY (2)  
3/8" DIA. SPRING LOADED  
SS LOCKING RODS

ALL MEASUREMENT STATED ARE INSIDE MEASUREMENT

CAT. #	WIDTH (DOOR)	LENGTH	HEIGHT
PW/ FTW - S	30"	40"	40"
PW/FTW - M	40"	50"	50"
PW/FTW - L	50"	60"	60"